


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS |     |                          |            |         |          |
|-----------|-----|--------------------------|------------|---------|----------|
| REV       | ECR | DESCRIPTION              | DATE       | INITIAL | APPROVED |
| 1         |     | RELEASED FOR PRODUCTION. | 10/10/2016 | RJC     | JAG      |

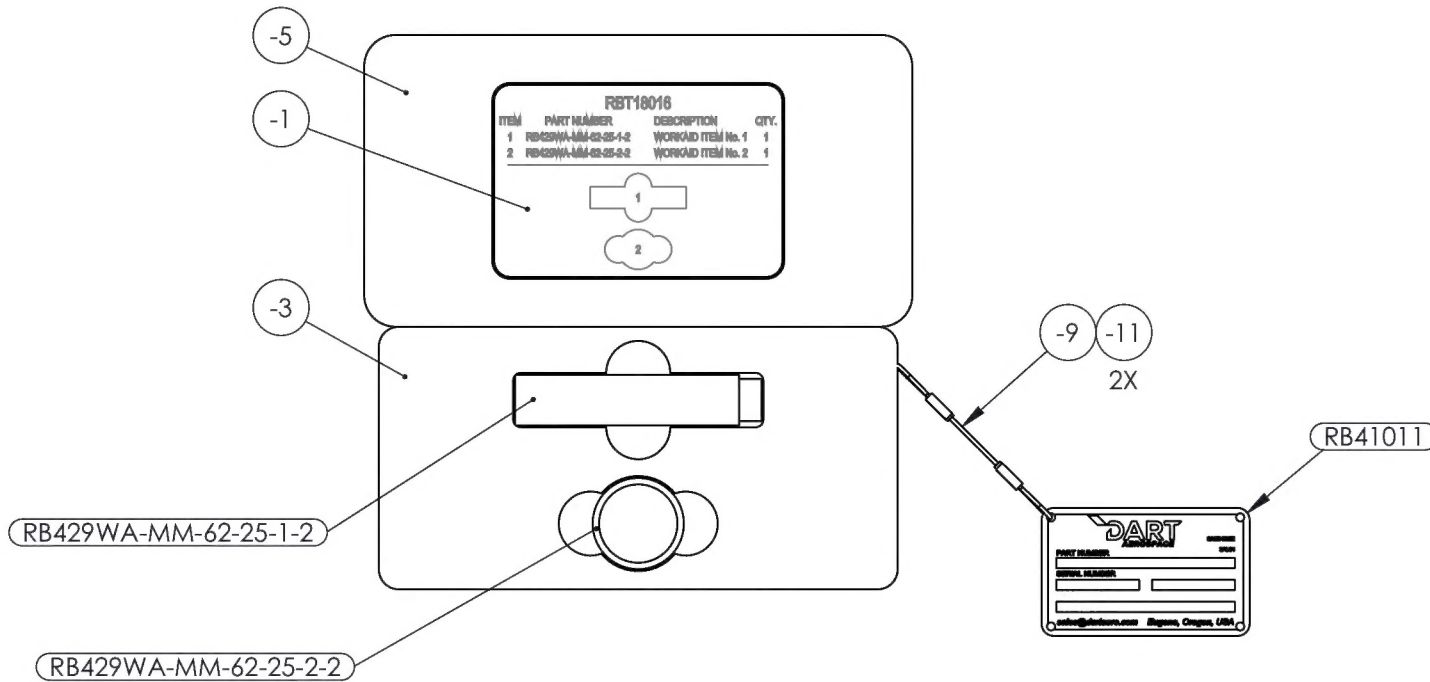

NOTE:  
REFERENCE FIGURE 62-25.

| ASSY QTY | ASSY QTY | B/O | Part #               | UNIT QTY | Description        | Material            | B/O INFORMATION OR SPECIFICATIONS    | PG. |
|----------|----------|-----|----------------------|----------|--------------------|---------------------|--------------------------------------|-----|
|          |          |     | RB429WA-MM-62-25-1-2 | 1        | WORKAID ITEM No. 1 |                     |                                      | 1   |
|          |          |     | RB429WA-MM-62-25-2-2 | 1        | WORKAID ITEM No. 2 |                     |                                      | 1   |
|          |          |     | -1                   | 1        | PLACARD            | PLASTIC             |                                      | 2   |
|          |          | B/O | -3                   | 1        | BOTTOM FOAM        | ETHAFOAM 220, BLACK | 1.40 X 4.10 X 8.10 (CASE SOLUTIONS)  | 3   |
|          |          | B/O | -5                   | 1        | TOP FOAM CUSHION   | ETHAFOAM 220, BLACK | .83 X 4.56 X 8.56 (CASE SOLUTIONS)   | 4   |
|          |          | B/O | -7                   | 1        | CASE               | PLASTIC             | PELICAN #APP-1060-E                  | N/S |
|          |          | B/O | -9                   | 1        | LANYARD            | COATED STEEL        | Ø1/16 X 3 (CARR LANE #CL-2-C)        | 1   |
|          |          | B/O | -11                  | 2        | FERRULE            | ALUMINUM            | Ø1/16 X 3/8 (MCMASTER-CARR #3896T31) | 1   |
|          |          | B/O |                      | 1        | DART PLACARD       | ALUMINUM            | RB41011                              | 1   |



|  |  |
|--|--|
| <b>DART AEROSPACE</b>                              |  |
| TITLE IDLER LINK ASSEMBLY -<br>BUSHING REPLACEMENT |  |
| DWG NO. RBT18016                                   | REV 1  |
| MAT'L  | UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES |
| TREAT  | .XXX ± .005 FRACTIONS ± 1/8                            |
| FINISH   | .XX ± .01 ANGLES ±.5°                                  |
| SPEC   | .X ± .1 SURFACES = 125°                                |
| DRAWN BY: CLOUGH                                   | 1. BREAK ALL SHARP EDGES<br>.015 x 45° OR .015R        |
| CHECKED: DUERFELDT                                 | 2. DIMENSIONAL LIMITS APPLY<br>AFTER PLATING           |
| OPPS APPR: ANDERSON                                | 3. INTERPRET DIM AND TOL PER<br>ASME Y14.5M-2009       |
| QA APPR: LINDSAY                                   | USED ON MODEL  |
| APPROVED: GILBERT                                  | BELL 429   |
| SCALE 1:3  | DATE 10/6/2016   |
| SHEET 1 OF 4                                       |  |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS |     |             |      |         |          |
|-----------|-----|-------------|------|---------|----------|
| REV       | ECR | DESCRIPTION | DATE | INITIAL | APPROVED |

4X R.25

BLACK BACKGROUND WITH  
WHITE LINES AND LETTERS

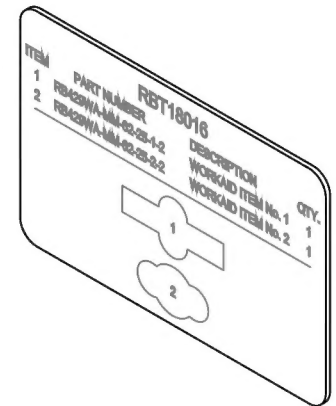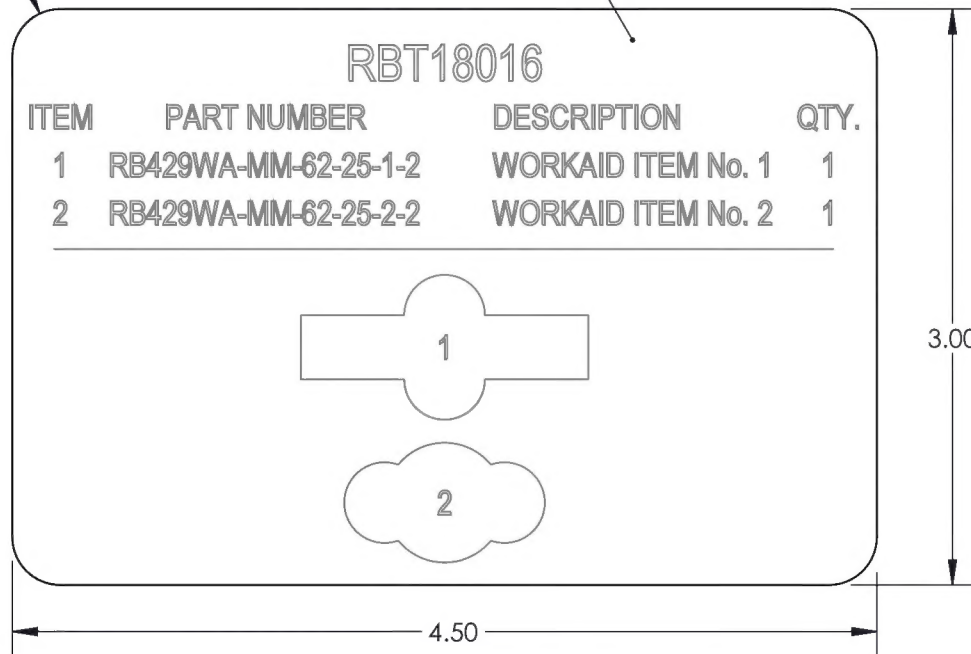




NOTE:  
USE PDF.

(-1)  
PLACARD

|  |  |
|--|--|
| <b>DART<br/>AEROSPACE</b>                          |  |
| TITLE IDLER LINK ASSEMBLY -<br>BUSHING REPLACEMENT |  |
| DWG NO. RBT18016-1                                 | REV 1  |
| MAT'L PLASTIC                                      | UNLESS OTHERWISE SPECIFIED                       |
| FEAT   | DIMENSIONS ARE IN INCHES                         |
| TREAT  | .XXX ± .010 FRACTIONS ± 1/8                      |
| FINISH   | .XX ± .03 ANGLES ± 1°                            |
| SPEC   | .X ± .1 SURFACES = 125° ✓                        |
| DRAWN BY: CLOUGH                                   | 1. BREAK ALL SHARP EDGES<br>.015 x 45° OR .015R  |
| CHECKED: DUERFELDT                                 | 2. DIMENSIONAL LIMITS APPLY<br>AFTER PLATING     |
| OPPS APPR: ANDERSON                                | 3. INTERPRET DIM AND TOL PER<br>ASME Y14.5M-2009 |
| QA APPR: LINDSAY                                   | USED ON MODEL                                    |
| APPROVED: GILBERT                                  | BELL 429   |
| SCALE 1:1  | DATE 10/6/2016                                   |
| SHEET 2 OF 4                                       |  |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS |     |             |      |          |
|-----------|-----|-------------|------|----------|
| REV       | ECR | DESCRIPTION | DATE | INITIAL  |
|           |     |             |      | APPROVED |

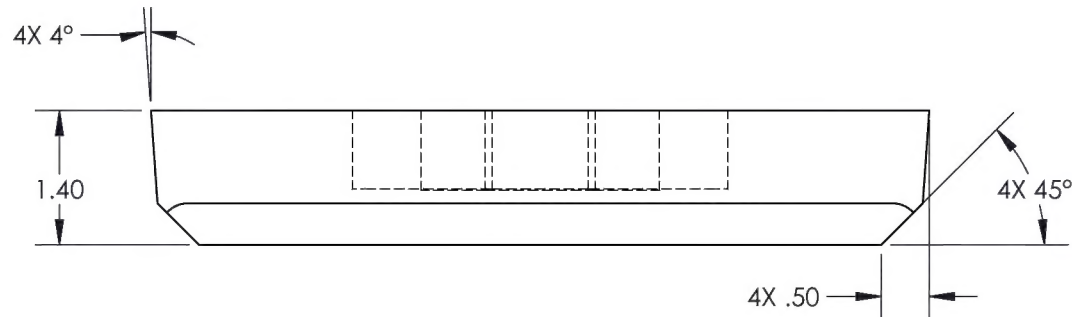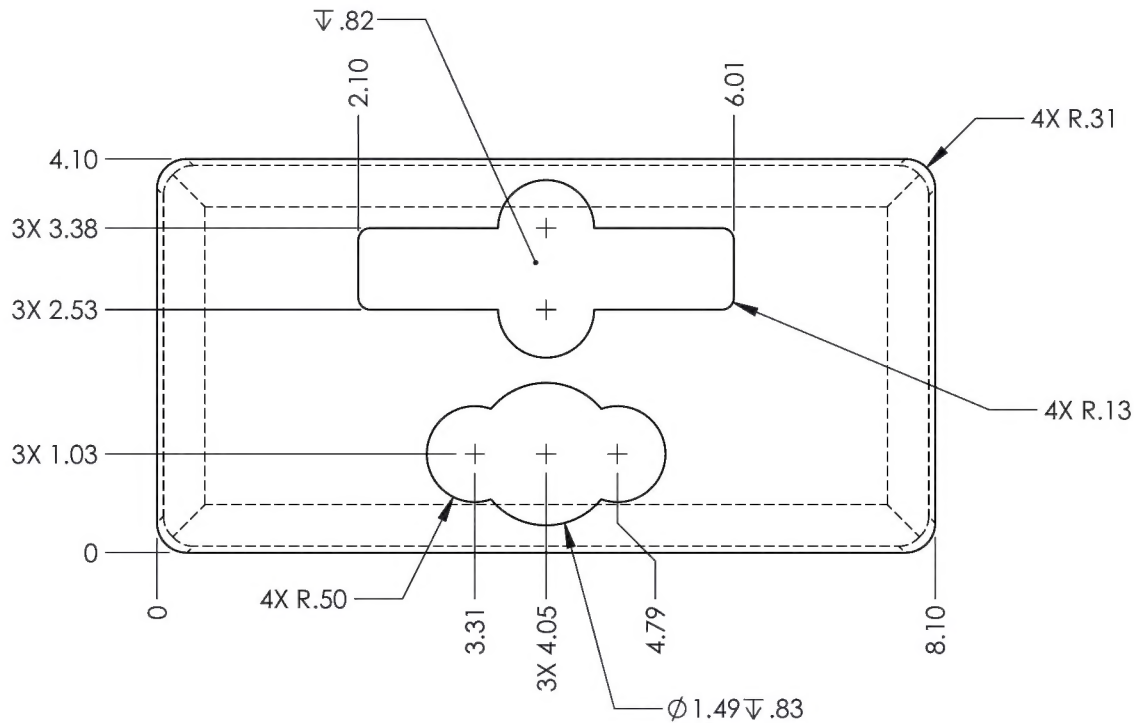




(-3)

BOTTOM FOAM

|  |                              |
|--|------------------------------|
| <b>DART<br/>AEROSPACE</b>                          |                              |
| TITLE IDLER LINK ASSEMBLY -<br>BUSHING REPLACEMENT |                              |
| DWG NO. RBT18016-3                                 | REV 1                        |
| MAT'L ETHAFOAM 220, BLACK                          |                              |
| UNLESS OTHERWISE SPECIFIED                         |                              |
| DIMENSIONS ARE IN INCHES                           |                              |
| .XXX ± .010 FRACTIONS ± 1/8                        |                              |
| .XX ± .03 ANGLES ± 1°                              |                              |
| .X ± .1 SURFACES = 125°                            |                              |
| SPEC   |                              |
| DRAWN BY: CLOUGH                                   | 1. BREAK ALL SHARP EDGES     |
| CHECKED: DUERFELDT                                 | .015 x 45° OR .015R          |
| OPPS APPR: ANDERSON                                | 2. DIMENSIONAL LIMITS APPLY  |
| QA APPR: LINDSAY                                   | AFTER PLATING                |
| APPROVED: GILBERT                                  | 3. INTERPRET DIM AND TOL PER |
|  | ASME Y14.5M-2009             |
| SCALE 1:2  | DATE 10/6/2016               |
|  | SHEET 3 OF 4                 |

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

| REVISIONS |     |             |      |         |          |  |
|-----------|-----|-------------|------|---------|----------|--|
| REV       | ECR | DESCRIPTION | DATE | INITIAL | APPROVED |  |

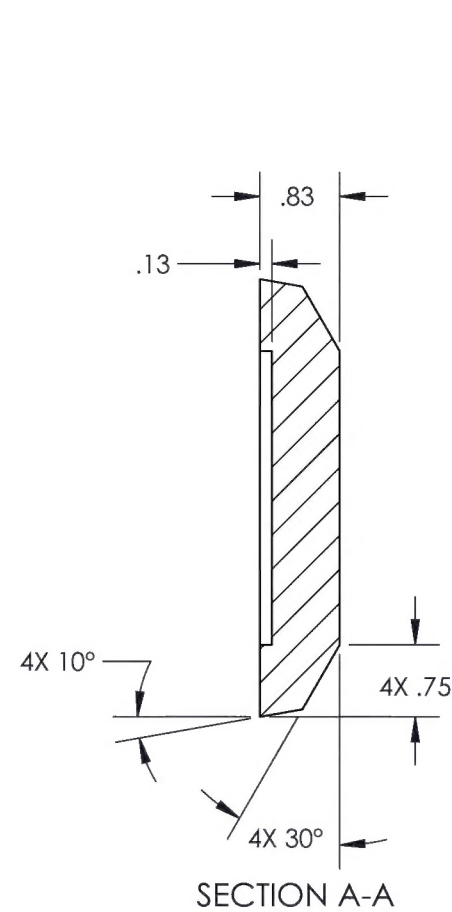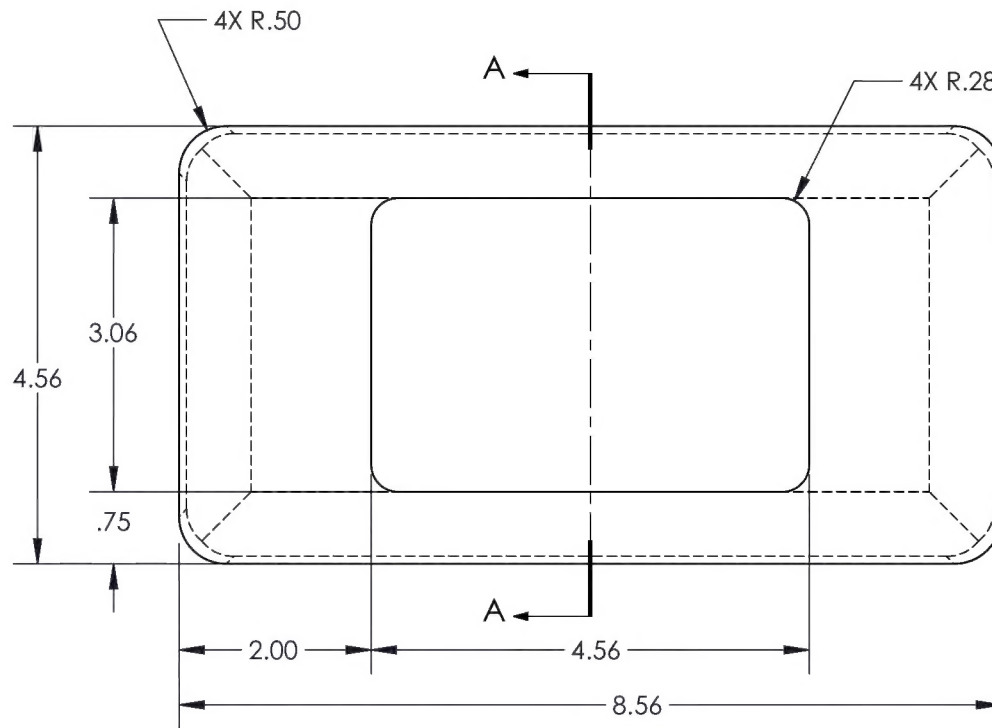

(5)

TOP FOAM CUSHION

|  |                |
|--|----------------|
| <b>DART<br/>AEROSPACE</b>                          |                |
| TITLE IDLER LINK ASSEMBLY -<br>BUSHING REPLACEMENT |                |
| DWG NO. RBT18016-5                                 | REV 1          |
| MAT'L ETHAFOAM 220, BLACK                          |                |
| UNLESS OTHERWISE SPECIFIED                         |                |
| DIMENSIONS ARE IN INCHES                           |                |
| .XXX ± .010 FRACTIONS ± 1/8                        |                |
| .XX ± .03 ANGLES ± 1°                              |                |
| .X ± .1 SURFACES = 125°                            |                |
| SPEC   |                |
| 1. BREAK ALL SHARP EDGES                           |                |
| .015 x 45° OR .015R                                |                |
| 2. DIMENSIONAL LIMITS APPLY                        |                |
| AFTER PLATING                                      |                |
| 3. INTERPRET DIM AND TOL PER                       |                |
| ASME Y14.5M-2009                                   |                |
| DRAWN BY: CLOUGH                                   | USED ON MODEL  |
| CHECKED: DUERFELDT                                 | BELL 429       |
| OPPS APPR: ANDERSON                                |                |
| QA APPR: LINDSAY                                   |                |
| APPROVED: GILBERT                                  |                |
| SCALE 1:2  | DATE 10/6/2016 |
| SHEET 4 OF 4                                       |                |